

NW Series Modular Diced Ice Machines – up to 200kg

NWL 508 AS OX Large dice cube 15g, 29mm x 22mm x 29mm



Large dice cube 15 g
W 29 x D 22 x H 29 mm



Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

Standard Features

- Up to 200kg daily production rate
- Head only ice maker – requires a recommended storage bins and top kits
- Air cooled version
- XSafe - Natural Sanitation System
- Vertical evaporator spray-system technology
- Top air discharge – suitable for narrow space installation
- Agion Technology resists the growth of microbes and prevents unpleasant odours
- T304 grade stainless steel exterior
- Auto-alert indicator lights to show operation status and maintenance
- One touch cleaning for time and labour saving
- Front evaporator access for easy servicing
- Includes air filter, water and drain hose

Recommended Storage Bins


- NB 193 – 129kg storage capacity
- NB 393 with CBT 30-52 AMCD cover – 181kg storage capacity
- NB 530 with CBT 30-52 AMCD cover – 243kg storage capacity



XSafe

NW Series Modular Diced Ice Machines – up to 200kg

NWL 508 AS OX Large dice cube, 15g 29mm x 22mm x 29mm

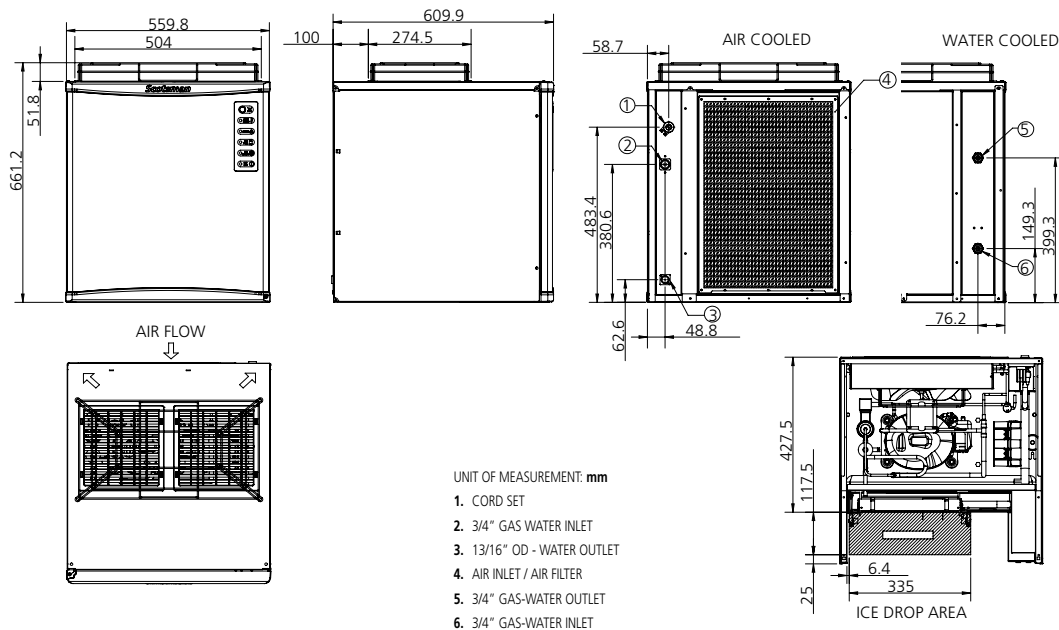

moffat.com.au

Australia
Moffat Pty Limited
Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9413 2400
wasales@moffat.com.au

Ice production per 24 hours

Ambient temperature / Water temperature

	10°C / 10°C	21°C / 10°C	32°C / 21°C
NWL 508 AS	210	200	145

Dimensions

Width:	560mm
Depth:	610mm
Height:	609mm
Nett weight:	67kg
Packed weight:	77kg

Water consumption

Air cooled version:
NWL 508 AS: 9.7 litres per hour

Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 1250W,
10A cordset supplied
No. Circuit wire: 3
Compressor: 2600W

Energy consumption: 23kW/24hr

Refrigerant type
R452a

Installation distance from wall

Rear 100mm
Sides 150mm
Operating requirement air temperature 10-43°C

Water connection requirements

Inlet connection: R 3/4"
Cold water: 5-38°C
Pressure: 100-150kPa
Water outlet connection: Ø 3/4"

Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd
AN.SM.2201