



AF Series Self Contained Flake Ice Machine - up to 68kg AF 87 AS OX Flake Ice








Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.


- Up to 68kg daily production rate
- 25kg storage bin capacity
- Air cooled version
- XSafe Natural Sanitation System
- Stainless steel auger and freezing cylinder evaporator
- Water in / ice out concept limits excess energy, water and time wastage
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- Simple, reliable electromechanic controls
- Clean alert indicator to clean filter
- Resistant stainless steel exterior
- Easy access front condenser air filter
- External indicator lights to show operation status
- Includes removable air filter, ice scoop, water and drain hose





AF Series Self Contained Flake Ice Machine - up to 68kg **AF 87 AS OX**

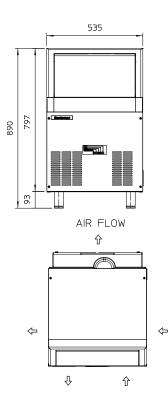









4. 3/4" - WATER INLET WATER COOLED UNIT ONLY 5. CORD SET







moffat.com.au

Australia Moffat Pty Limited

Victoria/Tasmania 740 Springvale Road Mulgrave, Victoria 3170 Telephone 03-9518 3888 Facsimile 03-9518 3833 vsales@moffat.com.au

New South Wales Telephone 02-8833 4111 nswsales@moffat.com.au

South Australia Telephone 03-9518 3888 vsales@moffat.com.au

Queensland Telephone 07-3630 8600 qldsales@moffat.com.au

Western Australia Telephone 08-9413 2400 wasales@moffat.com.au

Ice production per 24 hours

Ambient temperature / Water temperature				
	10°C / 10°C	21°C / 10°C	32°C / 21°C	

10 07 10 0	21 07 10 0	02 07 21 0
70	68	56

Dimensions V

Bunnenierierie	
Width:	535mm
Depth:	620mm
Height:	890mm (including legs)
Nett weight:	50kg
Packed weight:	58kg

Water consumption

Air cooled version: 2.4 litres per hour

Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 275W, 10A cordset supplied

No. Circuit wire: 3 Compressor: 200W Energy consumption: 6.2kW/24hr

Refrigerant type

R290

Installation distance from wall 100mm Rear

Sides 150mm Operating requirement air temperature 10-43°C

Water connection requirements

Inlet connection: R 3⁄4" 5-35°C Cold water: 100-500kPa Pressure: Water outlet connection: ؾ"

Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd AU.SM.2301

an Ali Group Company

