

## NW Series Modular Dice Ice Machines – up to 456kg

**NW 1008 AS OX** Dice cube 10g, 22mm x 22mm x 22mm

**NWH 1008 AS OX** Half dice cube 6g, 10mm x 22mm x 28mm

**NWL 1008 AS OX** Large dice cube 15g, 28mm x 22mm x 28mm



Dice cube 10 g  
W 22 x D 22 x H 22 mm



Half dice cube 6 g  
W 10 x D 22 x H 28 mm



Large dice cube 15 g  
W 28 x D 22 x H 28 mm



Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Up to 456kg daily production rate
- Head only ice maker - requires a separate storage bin to store the ice produced
- Air cooled version
- Vertical evaporator spray-system technology
- XSafe - Natural Sanitation System
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- T304 grade stainless steel exterior
- Auto-alert indicator lights to show operation status and maintenance
- One touch cleaning for time and labour saving
- Front evaporator access for easy servicing
- Includes air filter, water and drain hose
- Double stack option available

### Recommended storage bins


- NB 393 – 181kg storage capacity
- NB 530 – 243kg storage capacity
- NB 948 with CBT 48 EAMCD cover – 406kg storage capacity
- UBH 1100 – Upright storage bin with 553kg storage capacity



**XSafe**

### NW Series Modular Dice Ice Machines – up to 456kg

#### NW 1008 AS OX, NWH 1008 AS OX, NWL 1008 AS OX

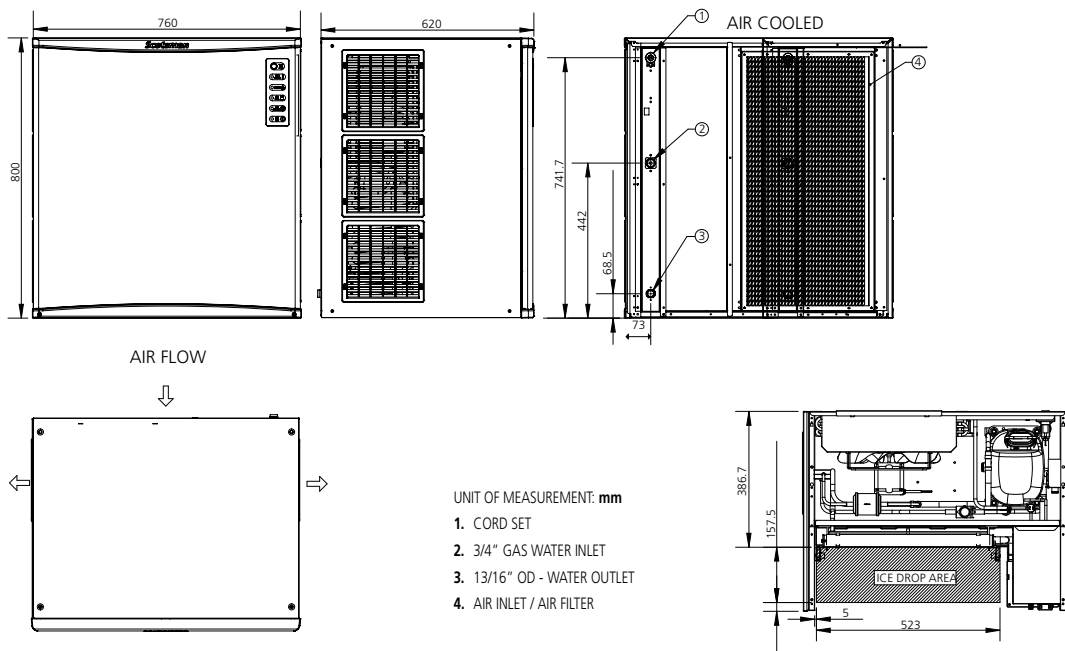

moffat.com.au

Australia  
Moffat Pty Limited  
Victoria/Tasmania  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone 03-9518 3888  
Facsimile 03-9518 3833  
vsales@moffat.com.au

New South Wales  
Telephone 02-8833 4111  
nswsales@moffat.com.au

South Australia  
Telephone 03-9518 3888  
vsales@moffat.com.au

Queensland  
Telephone 07-3630 8600  
qldsales@moffat.com.au

Western Australia  
Telephone 08-9413 2400  
wasales@moffat.com.au

#### Ice production per 24 hours

Ambient temperature / Water temperature

	10°C / 10°C	21°C / 10°C	32°C / 21°C
NW 1008 AS OX	485	456	380
NWH 1008 AS OX	485	456	380
NWL 1008 AS OX	485	456	380

#### Dimensions

Width: 760mm  
Depth: 620mm  
Height: 800mm  
Nett weight: 105kg  
Packed weight: 122kg

#### Water consumption

Air cooled version: NW 1008 AS 22.3 litres per hour

#### Electrical rating

Air cooled version: Single Phase: 230-240V, 1P+N+E,  
50Hz, 2100W, 15A cordset supplied  
Three Phase: 400-415V, 3P+N+E,  
50Hz, 2500W, 10A

No. Circuit wire: Single Phase: 3  
Three Phase: 5  
Compressor: Single Phase: 7300W  
Three Phase: 7300W  
Energy consumption: Single Phase: 50.3kW/24hr  
Three Phase: 23.1kW/24hr

Refrigerant type  
R404a

#### Installation distance from wall

Rear 100mm  
Sides 150mm  
Operating requirement air temperature 10-43°C

#### Water connection requirements

Inlet connection: R ¾"  
Cold water: 5-38°C  
Pressure: 100-500kPa  
Water outlet connection: Ø 20mm

#### Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd  
AU.SM.2301