



## NW Series Modular Dice Ice Machines – up to 630kg

**NW 1408 AS OX** Dice cube 10g, 22mm x 22mm x 22mm **NWH 1408 AS OX** Half dice cube 6g, 10mm x 22mm x 28mm **NWL 1408 AS OX** Large dice cube 15g, 28mm x 22mm x 28mm



Dice cube 10 g W 22 x D 22 x H 22 mm



Half dice cube 6 g W 10 x D 22 x H 28 mm



Large dice cube 15 g W 28 x D 22 x H 28 mm



Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Up to 630kg daily production rate
- Head only ice maker requires a separate storage bin to store the ice produced
- Air cooled version
- Vertical evaporator spray-system technology
- XSafe Natural Sanitation System
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- T304 grade stainless steel exterior
- Auto-alert indicator lights to show operation status and maintenance
- One touch cleaning for time and labour saving
- Front evaporator access for easy servicing
- Includes removable air filter, water and drain hose

#### Recommended storage bins

- NB 530 243kg storage capacity
- NB 948 with CBT 48 EAMCD cover 406kg storage capacity
- UBH 1100 Upright storage bin with 553kg storage capacity




















# NW Series Modular Dice Ice Machines – up to 630kg

## **NW 1408 AS OX, NWH 1408 AS OX, NWL 1408 AS OX**

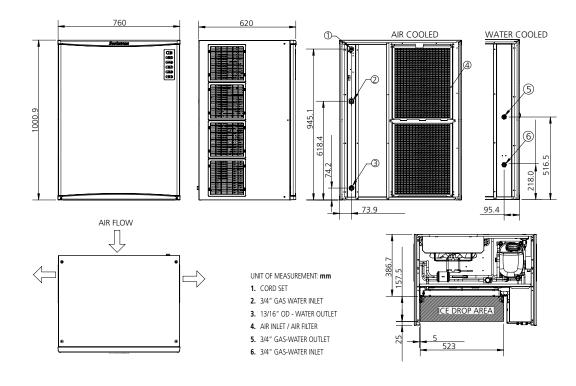



#### moffat.com.au

#### Australia Moffat Pty Limited

#### Victoria/Tasmania

740 Springvale Road Mulgrave, Victoria 3170 Telephone 03-9518 3888 Facsimile 03-9518 3833 vsales@moffat.com.au

### New South Wales

Telephone 02-8833 4111 nswsales@moffat.com.au

#### South Australia

Telephone 03-9518 3888 vsales@moffat.com.au

#### Queensland

Telephone 07-3630 8600 qldsales@moffat.com.au

#### Western Australia

Telephone 08-9413 2400 wasales@moffat.com.au

## Ice production per 24 hours

Ambient temperature / Water temperature

|                | 10°C /<br>10°C | 21°C /<br>10°C | 32°C /<br>21°C |
|----------------|----------------|----------------|----------------|
| NW 1408 AS OX  | 640            | 630            | 500            |
| NWH 1408 AS OX | 660            | 650            | 530            |
| NWL 1408 AS OX | 620            | 600            | 510            |

### Dimensions

Width: 760mm
Depth: 620mm
Height: 1000mm
Nett weight: 130kg
Packed weight: 145kg

## Water consumption

Air cooled version:

NW 1408 AS: 26.6 litres per hour NWH 1408 AS: 31.1 litres per hour NWL 1408 AS: 27.6 litres per hour

## Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 3365W,

20A cordset supplied

No. Circuit wire: 5

Compressor: 10500W

Energy consumption: 56.2kW/24hr (NW 1408 AS)

57.2kW/24hr (NWH 1408 AS) 52.8kW/24hr (NWL 1408 AS)

## Refrigerant type

R404a

## Installation distance from wall

Rear 100mm Sides 150mm

Operating requirement air temperature 10-43°C

#### Water connection requirements

Inlet connection: R 3/4"

Cold water: 5-38°C

Pressure: 100-500kPa

Water outlet connection: Ø 20mm

## Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd AU.SM.2301

an Ali Group Company

