# SURFACE-MOUNTED BOTTLE FILLER

Wall Mounted Mains Connected Bottle Filler

This refrigerated bottle filler is perfect for those high traffic areas. With a contactless, touch-free activation - there are no fears of cross-contamination in a touch sensitive environment.













## **KEY FEATURES**

- Touch free, electronic automatic dispense
- Heavy-duty steel frame with a stainless steel finish
- Integrated bottle counter and filter monitor
- Built-in 100-micron strainer stops particles before they enter the waterway
- Large alcove to fit most sports bottles
- Energy-efficient LEDs illuminate alcove and aids bottle filling
- Built-in drain no drip tray to empty
- Access through side panel for easy maintenance
- High efficiency cooling system and refrigerant R-134a

Our surface-mounted bottle filler units offer refrigerated drinking water with touch-free, electronic automatic dispense mechanism. Perfect for high-volume applications, this fountain utilises R-134a refrigerant with a high-performing refrigeration system.

A 100-micron strainer stops particles entering the lead-free waterway and a heavy-duty galvanised steel frame making the unit extra durable. This bottle filler also comes with a built-in bottle counter, filter monitor and programmable time-out feature.

All Oasis bottle fillers are made with proprietary Freshfield technology. Freshfield harnesses the natural bacteria-fighting power of silver by infusing it into a poly compound on moulded parts of the alcoves.




|                     | Model Information (AC-PN8EBFY)                       |
|---------------------|--|
| Activation          | Contactless (Infrared Sensor)                        |
| Sensor Coverage     | Up to 5cm (approx.)                                  |
| Filtration          | Filter (optional), Built-in 100 micron strainer      |
| Flow Rate           | 4.2 LPM  |
| Drainage Type       | Built-in drain. Removable drip-tray                  |
| Exterior            | Antimicrobial ABS Plastic, Brushed Stainless Steel   |
| Chassis             | Heavy Duty Galvanised Steel                          |
| Dimensions          | 323(H) x 455(W) x 935(D)                             |
| Alcove Height       | 265mm  |
| Net Weight          | 25.4kg   |
| Power Supply        | 220-240V, 50/60 Hz                                   |
| Cooling Performance | 60LPH<br>Below 10°C , 32°C Ambient, 27°C Inlet water |
| Total Current       | 0.1 A  |
| Power Cons.         | 7 W  |
| Country of Origin   | Mexico   |
| Warranty            | 1 Year Full, 2 Years Part Only                       |





## **TECHNICAL DRAWINGS**

### **AC-PN8EBFY**

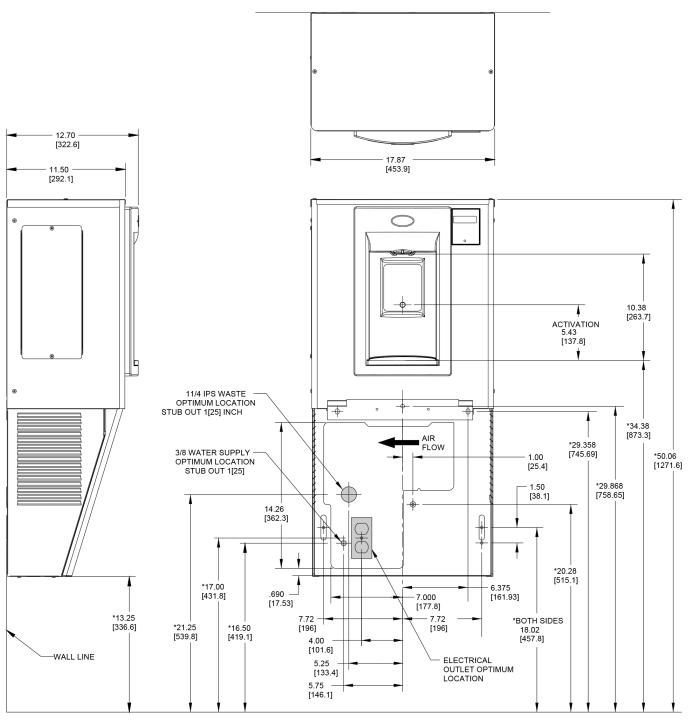

#### NOTES:

- 1. TRAP, STOP VALVE AND ELECTRICAL OUTLET NOT FURNISHED.
- 2. ALLOW 4 INCHES [102MM] MIN. PER SIDE FOR VENTILATION.
- \*3. RECOMMENDED ADULT BARRIER FREE HEIGHT INSTALLATION SHOWN. REDUCE HEIGHT BY 3 INCHES FOR INSTALLATIONS USED PRIMARILY BY CHILDREN AGES 12 AND YOUNGER. UNIT SHALL ALSO HAVE A MINIMUM CLEAR FLOOR SPACE 30[760] BY 48[1220]. ADJUST VERTICAL DIMENSIONS AS

