

# VERSAFILLER

## SURFACE-MOUNTED ALL-IN-ONE

Wall-Mounted Mains-Connected All-In-One Unit

The VersaFiller Series comes in a wide range of configurations, including single and split-level designs, both of which feature either manual or contactless bubblers and bottle fillers.



### KEY FEATURES

- Stainless steel top and heavy duty frame with galvanized or stainless steel option
- High efficiency cooling system and refrigerant R-134a
- Built-in 100 micron strainer stops particles before they enter the waterway
- Waterways are lead free in materials and construction
- External stream height adjustment on bubblers
- Hands-free bottle filler with programmable shut off timer (hands free version only)
- Integrated bottle counter and filter monitor. (hands free version only)

With the option to upgrade to a vandal-resistant design, the VersaFiller is perfect for schools and other public areas. All VersaFiller fountains use R-134a refrigerant and have an efficient, high-performing refrigeration system.

All Oasis bottle fillers are made with proprietary Freshield technology. Freshield harnesses the natural bacteria-fighting power of silver by infusing it into a poly compound on moulded parts of the alcoves.



### Model Information


	AC-PV8SBFY-ASM	AC-PV8EBFY-ASM	AC-P8EBFTY-ASM	AC-PV8SBFSLY-ASM	AC-PV8EBFSLY-ASM	AC-P8EBFSLTTY-ASM
	Single Level			Split Level		
<b>Bottle Filler Activation</b>	Manual	Contactless	Contactless	Manual	Contactless	Contactless
<b>Drinking Fountain Activation</b>	Manual, Vandal Resistant	Manual, Vandal Resistant	Contactless	Manual, Vandal Resistant	Manual, Vandal Resistant	Contactless
<b>Sensor Coverage</b>	n/a	Up to 5cm (approx.)		n/a	Up to 5cm (approx.)	
<b>Filtration</b>	Filter (optional), Built-in 100 micron strainer					
<b>Water Connections</b>	Inlet: 1/2" BSP connector, Drain: 40mm Female Socket (Not trapped)					
<b>Exterior</b>	Antimicrobial ABS Plastic, Brushed Stainless Steel					
<b>Chassis</b>	Heavy Duty Galvanised Steel					
<b>Dimensions</b>	960(H) x 413(W) x 473(D)			960(H) x 895(W) x 473(D)		
<b>Alcove Height</b>	250mm					
<b>Net Weight</b>	31kg			43kg		
<b>Power Supply</b>	220-240V, 50/60 Hz					
<b>Cooling Performance</b>	30 LPH - Rated Capacity & Base Rate - (10°C in 21°C amb. temp.)					
<b>Full Load Amps</b>	2.2 A					
<b>Rated Watts</b>	457 W					
<b>Country of Origin</b>	Mexico					
<b>Certifications</b>	WaterMark, ANSI/NSF 61, CABO/ANSI A117.1, ADA, CE (LVD, EMC, RoHS)					
<b>Warranty</b>	1 Year Full, 2 Years Parts Only					

Your Partner in Cool.

**AQUA**  
**COOLER**


# TECHNICAL DRAWINGS


## Single Level Units (AC-PV8SBFY-ASM, AC-PV8EBFY-ASM, AC-P8EBFTY-ASM)

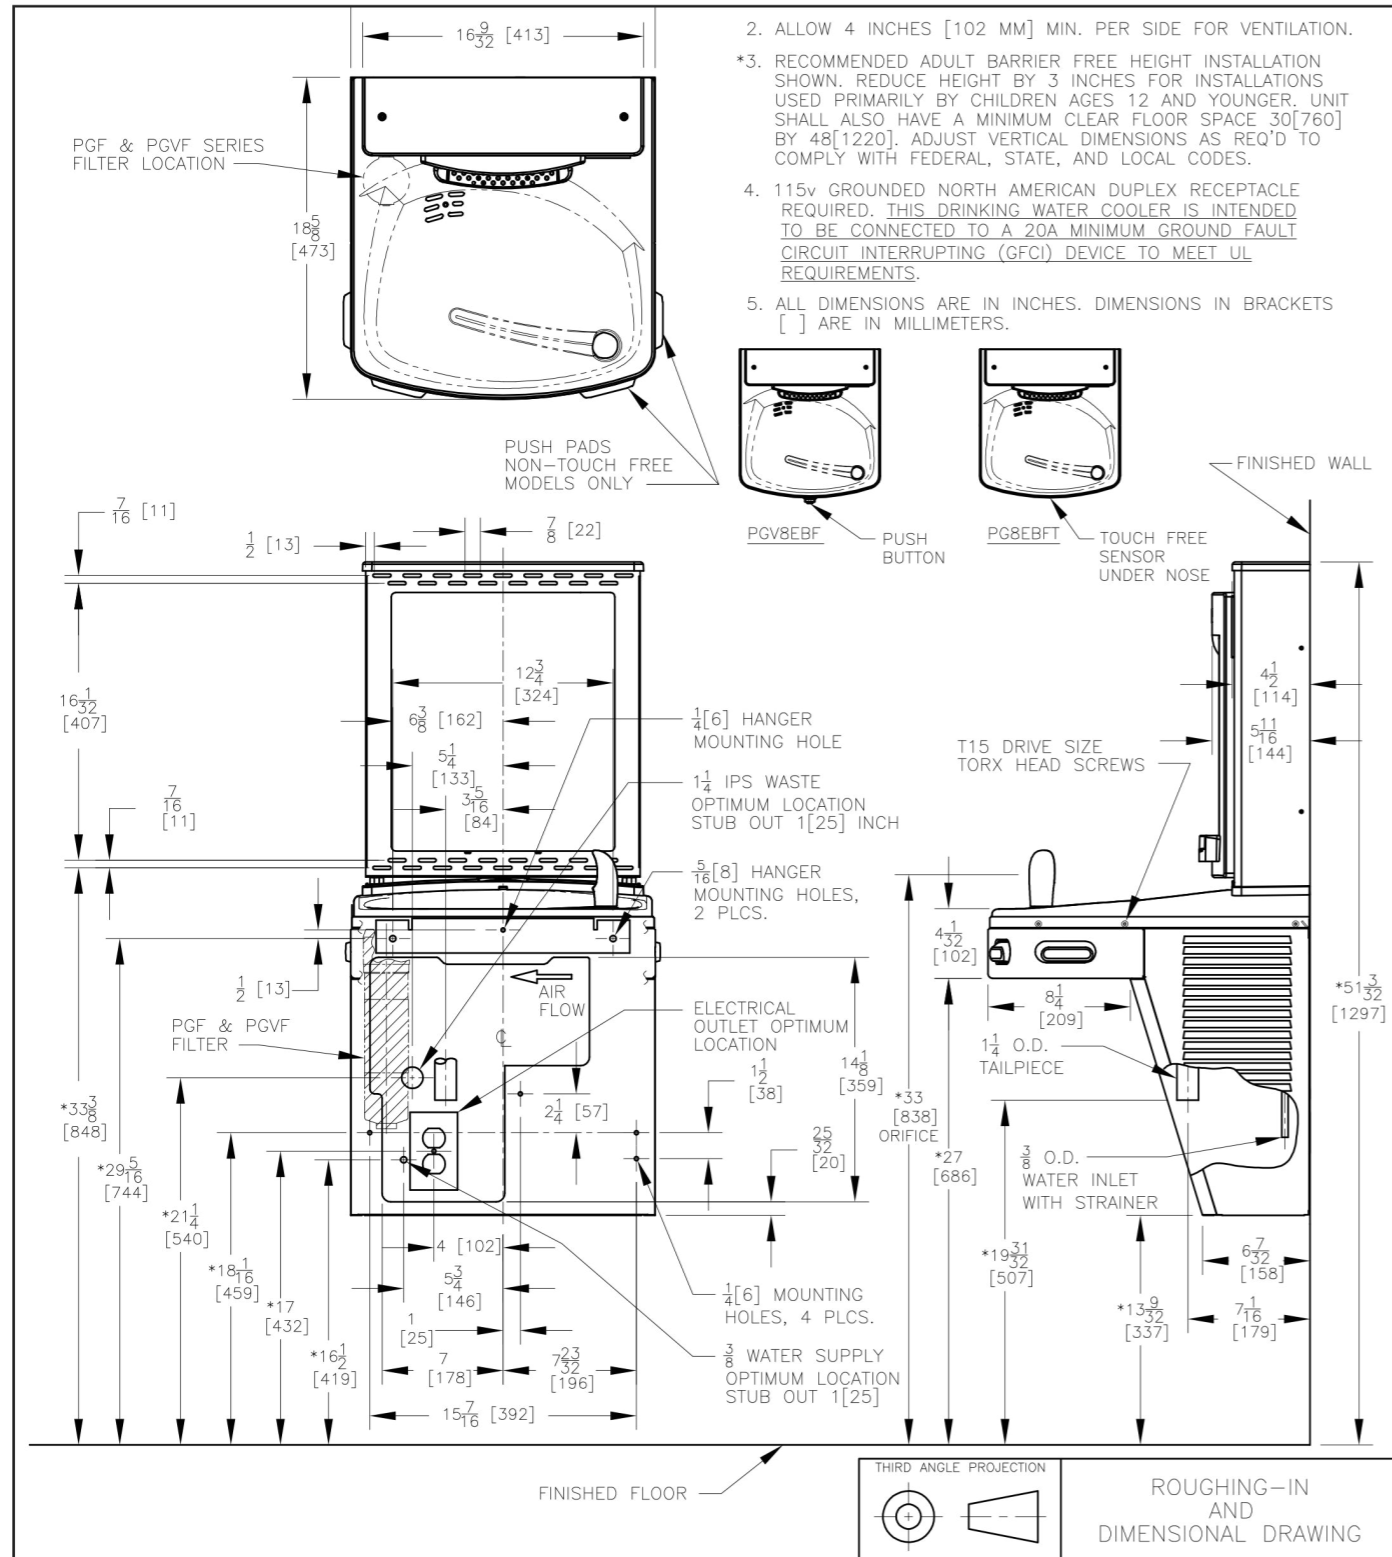

# TECHNICAL DRAWINGS

## Split Level Units (AC-PV8SBFSLY-ASM, AC-PV8EBFSLY-ASM, AC-P8EBFSLTTY-ASM)

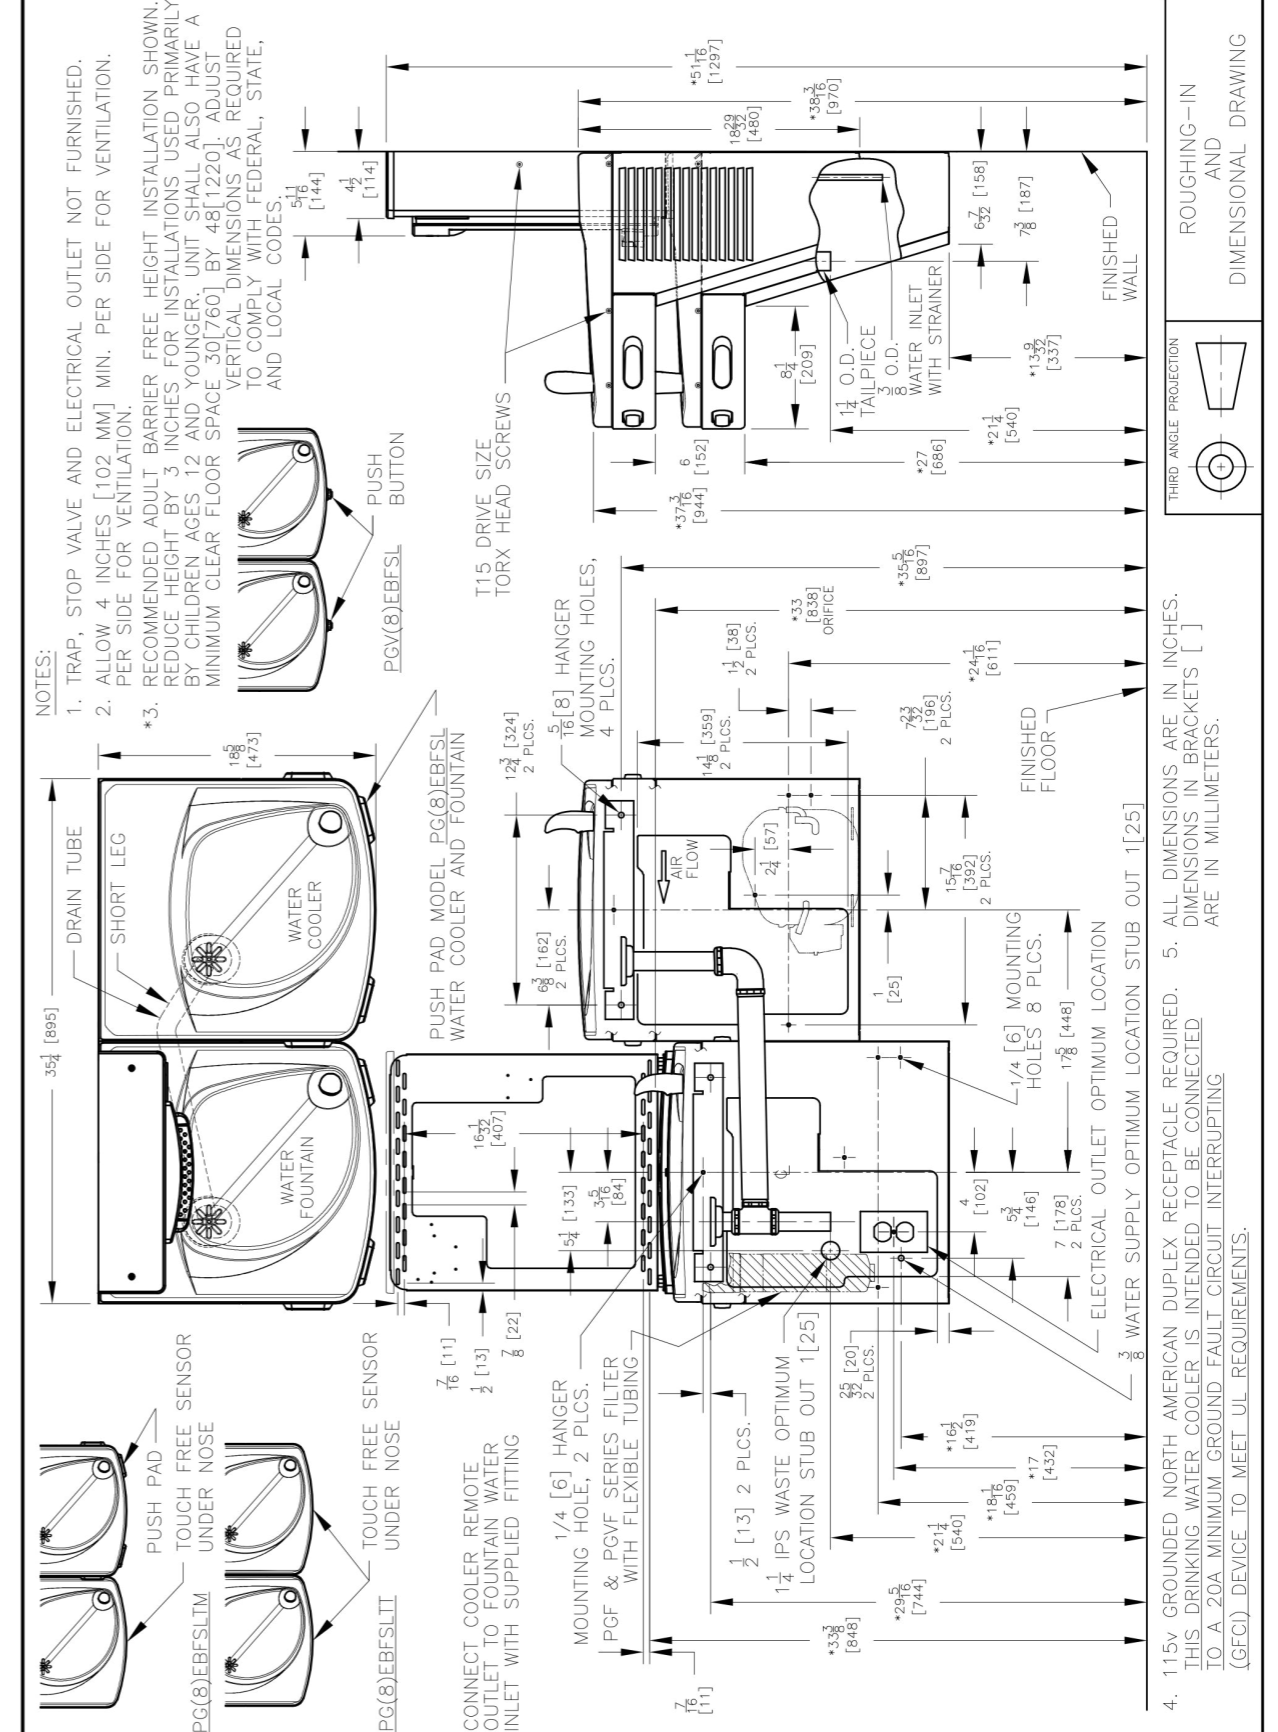

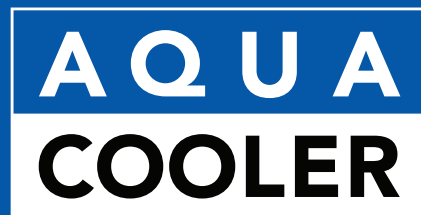

Your Partner in Cool.