

## EC Series Self Contained Gourmet Ice Machines – with Progressive Water Discharge – up to 152kg

**ECS 226 AS OX** Small gourmet cube 8g, Ø21mm x 25mm



Small gourmet cube  
8g, 21mm dia x H 25mm



Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.




- Up to 152kg daily production rate
- 70kg storage bin capacity
- Air cooled version
- Produces individual transparent Gourmet crystal clear supercubes
- PWD-Progressive water discharge: pumps excess residual water up to a distance up to 15 meters
- XSafe - Natural Sanitation System
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- Simple, reliable electromechanic controls
- Horizontal ice evaporator spray-system technology
- Resistant stainless steel exterior
- Front access condenser air filter, removable and washable
- Easy access front ON-OFF switch
- Routine maintenance visible alarm light on front panel
- Ergonomically designed ice storage access with disappearing door and door closing movement dampening system
- Includes ice scoop, water and drain hose




**XSafe**

## EC Series Self Contained Gourmet Ice Machines – with Progressive Water Discharge – up to 152kg

### ECS 226 AS OX



- UNIT OF MEASUREMENT: mm
1. 3/4" OD - OVERFLOW DRAIN
  2. 3/4" GAS - WATER INLET
  3. 3/4" GAS - WATER OUTLET  
WATER COOLED UNIT ONLY
  4. 3/4" GAS - WATER INLET  
WATER COOLED UNIT ONLY
  5. CORD SET

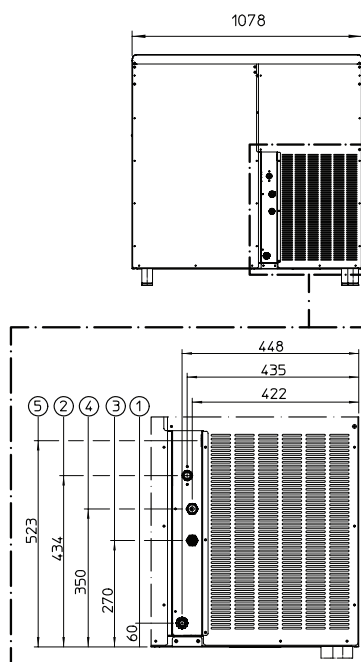

moffat.com.au

Australia  
Moffat Pty Limited  
Victoria/Tasmania  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone 03-9518 3888  
Facsimile 03-9518 3833  
vsales@moffat.com.au

New South Wales  
Telephone 02-8833 4111  
nswsales@moffat.com.au

South Australia  
Telephone 03-9518 3888  
vsales@moffat.com.au

Queensland  
Telephone 07-3630 8600  
qldsales@moffat.com.au

Western Australia  
Telephone 08-9413 2400  
wasales@moffat.com.au

#### Ice production per 24 hours

Ambient temperature / Water temperature

10°C / 10°C	21°C / 10°C	32°C / 21°C
155	152	100

#### Dimensions

Width:	1078mm
Depth:	719mm
Height:	1082mm (including legs)
Nett weight:	98kg
Packed weight:	112kg

#### Water consumption

Air cooled version: 17 litres per hour

#### Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 1500W,  
10A cordset supplied

No. Circuit wire: 3  
Compressor: 2571W  
Energy consumption: 24.7kW/24hr

#### Refrigerant type

R404a

#### Installation distance from wall

Rear 150mm  
Sides 150mm  
Operating requirement air temperature 10-43°C

#### Water connection requirements

Inlet connection: R 3/4"  
Cold water: 5-38°C  
Pressure: 100-500kPa  
Water outlet connection: Ø3/4"

#### Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd  
AU.SM.2201