



# EC Series Self Contained Gourmet Ice Machines – with Progressive Water Discharge – up to 31kg

ECS 57 AS OX Small gourmet cube 8g, Ø21mm x 25mm



Small gourmet cube 8g, 21mm dia x H 25mm



Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Up to 31kg daily production rate
- 12kg storage bin capacity
- Air cooled version
- Produces individual transparent Gourmet crystal clear supercubes
- Hydrocarbons R290 refrigerant gas
- XSafe Natural Sanitation System
- PWD-Progressive water discharge: pumps excess residual water up to a distance up to 15 meters
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- Simple, reliable electromechanic controls
- Horizontal ice evaporator spray-system technology
- Resistant stainless steel exterior
- Front access condenser air filter, removable and washable

- Routine maintenance visible alarm light on front panel
- Ergonomically designed ice storage access with disappearing door and door closing movement dampening system
- Includes removable air filter, ice scoop, water and drain hose
- Optional legs available















## EC Series Self Contained Gourmet Ice Machines – with Progressive Water Discharge – up to 31kg


## ECS 57 AS OX

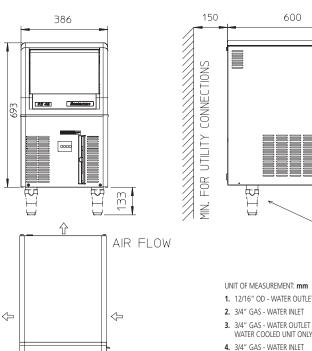



#### UNIT OF MEASUREMENT: mm

- 1. 12/16" OD WATER OUTLET
- 2. 3/4" GAS WATER INLET
- 3. 3/4" GAS WATER OUTLET
- 4. 3/4" GAS WATER INLET WATER COOLED UNIT ONLY
- 5. CORD SET





#### moffat.com.au

## Australia Moffat Pty Limited

## Victoria/Tasmania

740 Springvale Road Mulgrave, Victoria 3170 Telephone 03-9518 3888 Facsimile 03-9518 3833 vsales@moffat.com.au

### New South Wales

Telephone 02-8833 4111 nswsales@moffat.com.au

#### South Australia

Telephone 03-9518 3888 vsales@moffat.com.au

#### Queensland

Telephone 07-3630 8600 qldsales@moffat.com.au

## Western Australia

Telephone 08-9413 2400 wasales@moffat.com.au

## Ice production per 24 hours

Ambient temperature / Water temperature

10°C / 10°C	21°C / 10°C	32°C / 21°C
33	31	25

### Dimensions

386mm Width: 600mm Depth: 695mm Height: Nett weight: 38kg Packed weight: 45kg

#### Water consumption

Air cooled version: 4.0 litres per hour

## Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 370W,

10A cordset supplied

No Circuit wire: Compressor: 730W Energy consumption: 6.6kW/24hr

## Refrigerant type

R290

## Installation distance from wall

Rear 150mm 150mm Sides

Operating requirement air temperature 10-43°C

#### Water connection requirements

Inlet connection: R 3/4" 5-38°C Cold water: Pressure: 100-500kPa Water outlet connection: Ø3/4"

Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals



© Copyright Moffat Ltd

